

HLL LIFECARE LIMITED
(A Government of India Enterprise)
AKKULAM PLANT, SREEKARIYAM P.O,
THIRUVANANTHAPURAM-695017
Email: materialsft@lifecarehll.com
Website: www.lifecarehll.com
PH: +91 471 2442641, 2445930
FAX: +91 471 2445935



Tender No: HLL/AFT/PUR/RCW/2024-25 dtd 02/03/2024

**Tender for Retaining wall work near Biogas plant
and Cooling tower at HLL Lifecare Limited,
Akkulam Factory, Thriuvanathapuram -17**

TENDER NOTICE

Sub:Tender for Retaining wall work near Biogas plant and Cooling tower at HLL Lifecare Ltd Factory, Akkulam, Thiruvananthapuram -17 reg:-

Competitive sealed and super scribed bids are invited in the prescribed Format for Tender for Retaining wall work near Biogas plant and Cooling tower at HLL Lifecare Ltd Factory, Akkulam, Thiruvananthapuram -17

A complete set of bid documents can be had from the office of the JOINT GENERAL MANAGER (MATERIALS) HLL LIFECARE LTD, AKKULAM, THIRUVANANTHAPURAM-695 017 during office hours on any working day up to 12 hrs on 15/03/2024, on submission written application.

The Tender Documents can also be downloaded from our Website www.lifecarehll.com.

Tender opening details:

- a) Last date and time for receipt of bids : 15/03/2024 upto 2.00 PM
- b) Date and time of opening of bid : 15/03/2024 at 3.30PM
- c) Address for communication, receipt and Place of opening of bids:


JOINT GENERAL MANAGER (MATERIALS)
HLL LIFE CARE LIMITED,
AKKULAM, SREEKARIYAM.P.O
THIRUVANANTHAPURAM – 695 017,
KERALA, INDIA
Ph No: (0471) 2445930, Fax: (0471) 2445935

TERMS & CONDITIONS

1. Any changes pertains to this tender shall be communicated through our website www.lifecarehll.com only.
2. The rates mentioned in the table shall be inclusive of all the statutory taxes and levies as per statutory rules.
3. The bidder should have similar type experience in Construction/Civil work in any reputed organizations and should produce the documents as and when required.
4. HLL may, at its discretion, extend this deadline for submission of bids by amending the Bid Documents, in such case, all rights and obligations of the HLL and Bidders previously subject to the deadline will thereafter be subject to the deadline as extended. HLL will not be held responsible for the postal delay, if any, in the delivery of the bidding document or non-receipt of the same. Bids sent by Telex/Fax/Telegraph will not be accepted. The company reserves the right to club or split the items of works, change the qualifying criteria at their discretion and to reject / cancel the tender without assigning any reason thereof.
5. The completed bid documents in sealed cover superscribed " Tender for Retaining wall work near Biogas plant and Cooling tower at HLL Lifecare Limited, Akkulam Factory, Thriuvananthapuram -17" should reach the office on **15.03.2024** before 2 PM and the bids received till the prescribed time will be opened on the same day at 3.30 PM. in the presence of interested bidders/or their authorized representatives.
6. In the event of the date specified for bid receipt and opening being declared as a closed holiday for HLL's office, the due date for submission of bids and opening of bids will be the following working day at the appointed times.
7. Unit Chief HLL Lifecare Limited, Akkulam Factory reserves the right to cancel the tender at any time during the work without assigning any reason thereof.
8. The Company reserves the right to give the contract work to a single party or more parties at its discretion and the same shall be binding on all parties concerned.
9. Statutory deductions are applicable in the final contract rate and in the payable bill amount.
10. All the material required for the work shall be in the scope of Contractor. HLL reserves right to inspect the materials being used for the work.
11. Materials used for the work shall have ISI certification.
12. Preferred makes material, Cement: Sanker/Ramco/Dalmia/Ambuja/or approved equivalent
Steel: Vizag/Tata/Jindal/Sail/Kairali/or approved equivalent.
13. Contractor shall provide Insurance for the employees deputed for the work under work compensation policy. .
14. Rate shall be quoted as per Price Bid format. Rate comparison will be done in the consolidated total Amount basis.

15. Payment shall be made on actual quantity of executive basis through joint measurement.
16. Payment shall be made within 30 days from the date of completion of work and certification
By HLL Officials.
17. Penalty @ 2% per day up to a maximum of 10% per docket value will be imposed, if the work is not executed within the time limit as per the order.
18. The company reserves the right to reject / cancel any bids without assigning any reason thereof.
19. Only Vendors with **GST Registration will be considered for Bid submission and their GST Registration Certificate** is to be submitted as proof along with Bid documents.

Joint General Manager (Materials)

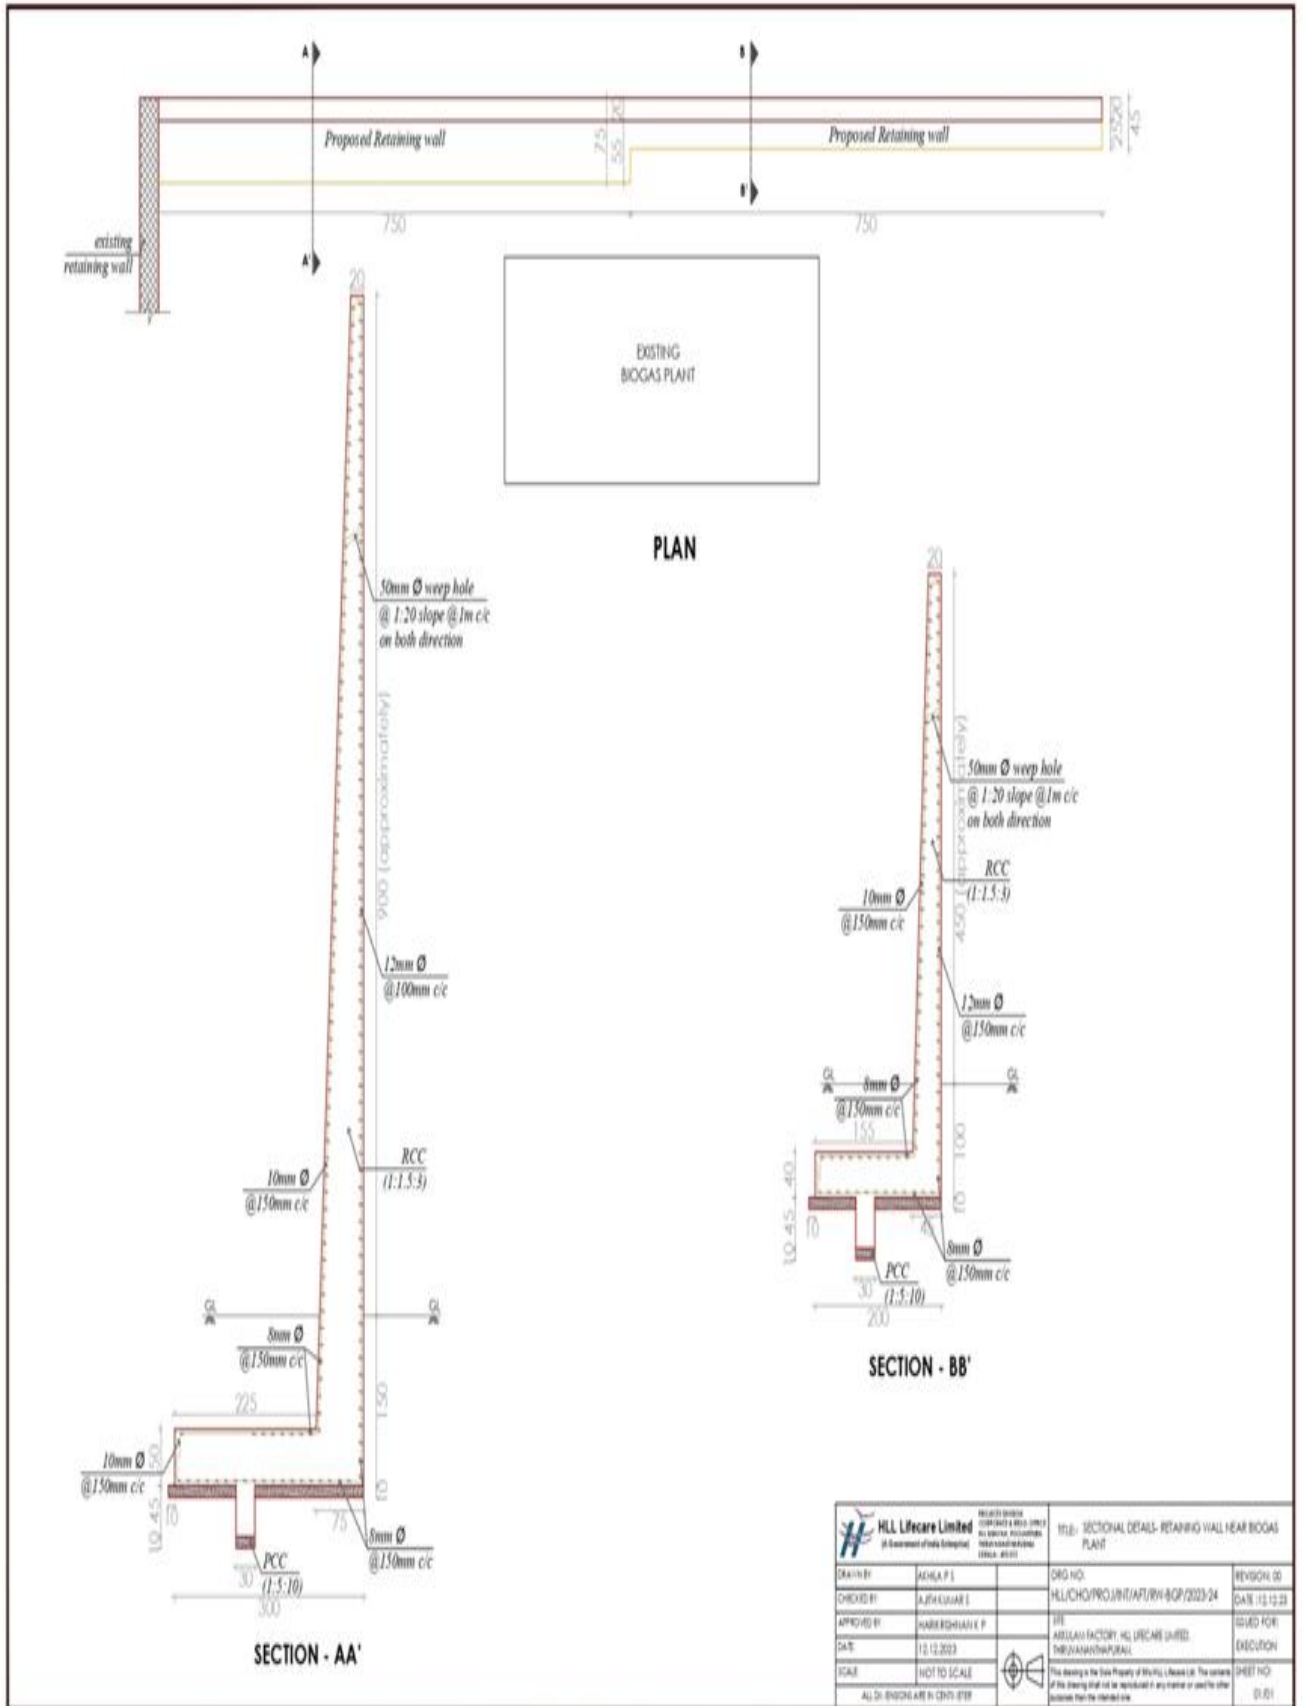

RETAINING WALL PLAN – HLL AFT



Retaining wall work at AFT-Retaining wall work near Biogas plant and Cooling tower at HLL Lifecare Ltd Factory, Akkulam, Thiruvananthapuram.

Sl. No	Specification	Quantity	Rate	Amount
1	Demolishing Work			
1.001	Demolishing R.C.C. work manually / by mechanical means including stacking of steel bars and disposal of unserviceable material with in 50 metres lead as per direction of Engineer -in-Charge.	1.000cum		
1.002	Demolishing brick work manually / by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 metres lead as per direction of Engineer-in-Charge.In cement mortar	1.000cum		
1.003	Demolishing stone rubble masonry manually / by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 metres lead as per direction of Engineer -in-Charges:In cement mortar	17.128cum		
2	Earth Work			
2.001	Extra for every additional lift 1.5 m or part there of in excavation / banking excavated or stacked materials.All kinds of soil	67.750cum		
2.002	Felling trees of the girth (measured at a height of 1 m above ground level) including cutting of trunks and branches, removing the roots and stacking of serviceable material and disposal of unserviceable material.Beyond 60 cm girth up to and including 120 cm girth	2.000each		
2.003	Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundation etc. in layers not exceeding 20 cm in depth, consolidating each deposited layer by ramming and watering, lead up to 50 m and lift up to 1.5 m.	133.500cum		

2.004	Earth work in excavation by mechanical means (Hydraulic excavator) /manual means in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan), including dressing of sides and ramming of bottoms, lift up to 1.5 m, including getting out the excavated soil and disposal of surplus excavated soil as directed, within a lead of 50 m.All kinds of soil	43.740cum		
2.005	Extra for levelling & neatly dressing of disposed soil completely as directed by Engineer-in-charge.	133.500cum		
2.006	Earth work in excavation by mechanical means (Hydraulic excavator)/manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) including disposal of excavated earth, lead up to 50 m and lift up to 1.5 m, disposed earth to be levelled and neatly dressed.All kinds of soil	98.475cum		
3	Concrete Work			
3.001	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:5:10 (1 cement : 5 fine sand : 10 graded stone aggregate 40 mm nominal size)	4.282cum		
3.002	Providing and laying in position specified grade of reinforced cement concrete, excluding the cost of centering, shuttering, finishing and reinforcement - All work up to plinth level:1:1:5:3 (1 cement 1.5 coarse sand :3 graded stone aggregate 20 mm nominal size	23.984cum		
3.003	Reinforced cement concrete work in walls (any thickness), including attached pilasters, buttresses, plinth and string courses, fillets, columns, pillars, piers, abutments, posts and struts etc. up tot floor five level excluding cost of centering, shuttering, finishing and reinforcement :1:1.5:3(1 cement : 1.5 coarse sand : 3 graded stone aggregate 20 mm nominal size)	71.448cum		
3.004	Centering and shuttering including strutting, etc. and removal of form for:Foundations, footings, bases of columns, etc for mass concrete	26.200sqm		
3.005	Centering and shuttering including strutting, etc. and removal of form for:Walls (any thickness) including attached pilasters, butteresses, plinth and string courses etc.	299.220sqm		

3.006	Steel reinforcement for R.C.C work including straightening, cutting, bending, placing in position and binding all complete upto plinth level Thermo - Mechanically Treated bars of grade Fe-500D or more	1920.00 kilogram		
3.007	Steel reinforcement for R.C.C work including straightening, cutting, bending, placing in position and binding all complete above plinth level. Thermo - Mechanically Treated bars of grade Fe-500D or more	5720.000kg		
3.008	Supply, spreading and proper fixing of low density polyethylene (LDPE) sheet having minimum 500 micron thickness and greater tear strength over compacted and leveled base course by lapping 200mm on all joints including all required as per the instruction of Engineer In Charge.	125.240sqm		
4	Finishing Works			
4.001	Finishing walls with Premium Acrylic Smooth exterior paint with Silicone additives of required shade: New work (Two or more coats applied @ 1.43 ltr/ 10 sqm over and including priming coat of exterior primer applied @ 2.20 kg/ 10 sqm)	201.300sqm		
	TOTAL			
	GST@18%			
	GRAND TOTAL			