This drawing is the property of **Larsen & Toubro Limited**, ECC Division and must not be passed on to any person or body not authorised by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing

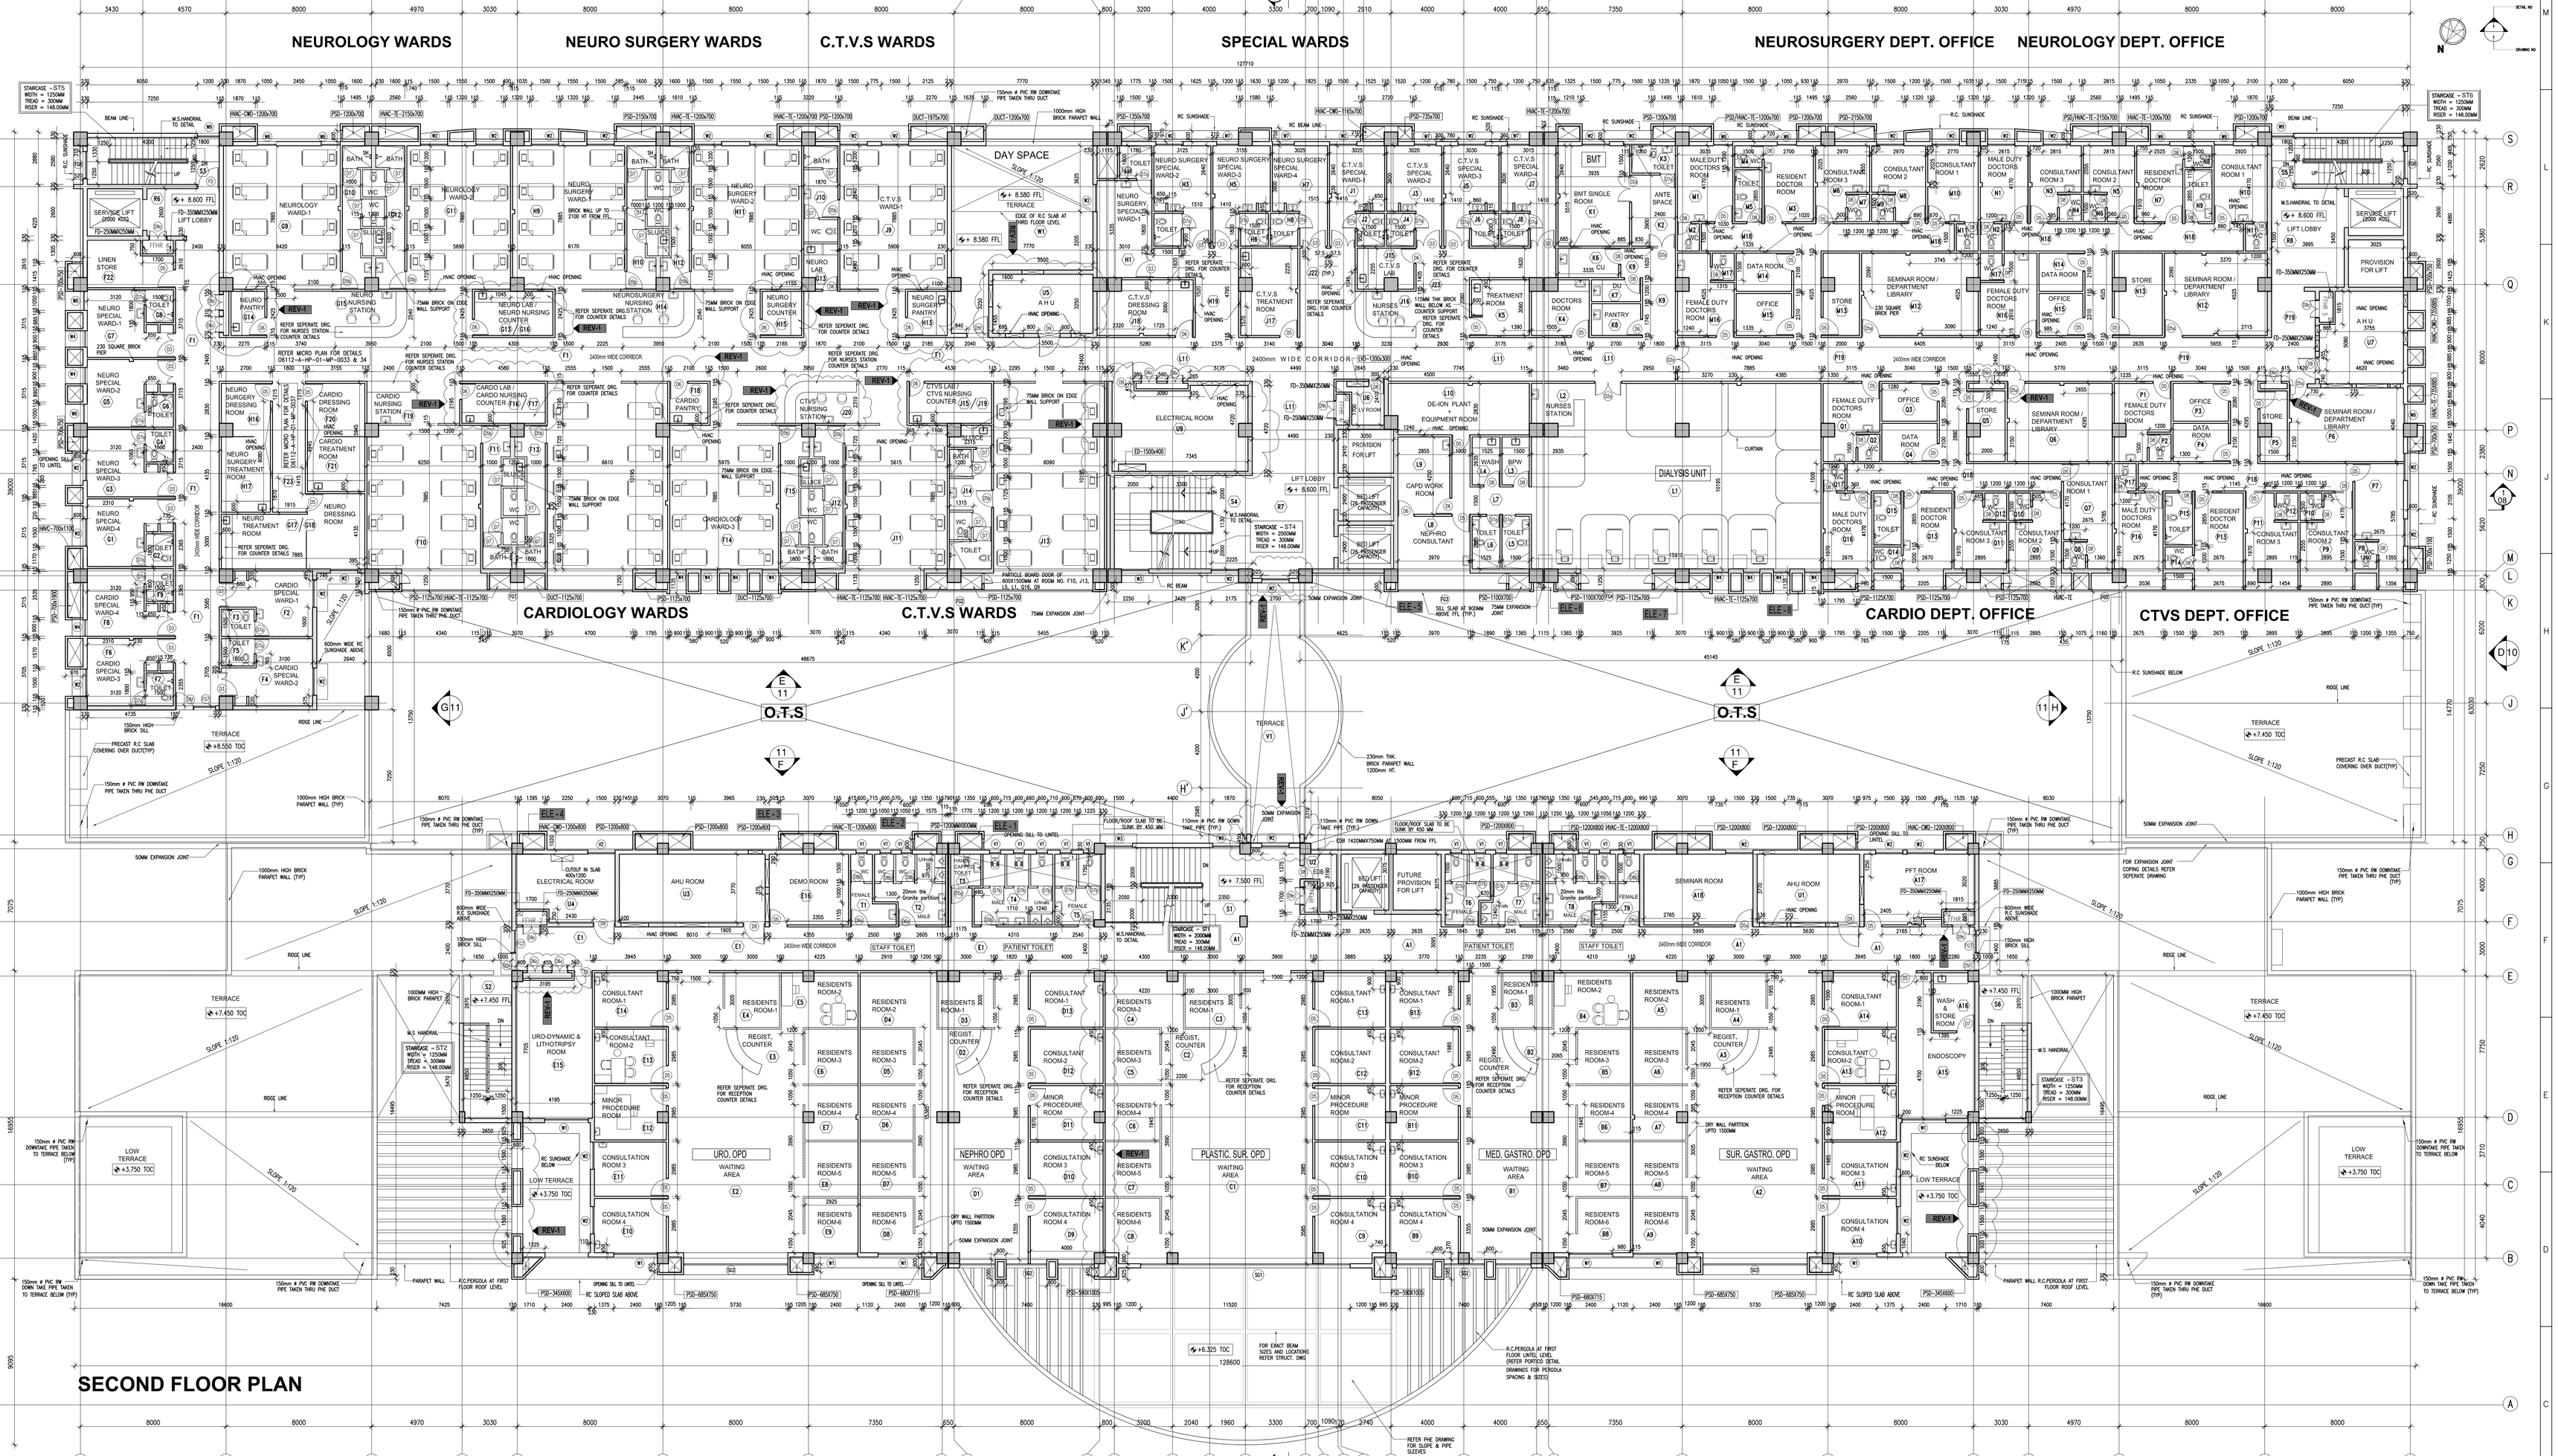

SECOND FLOOR PLAN

SCHEDULE OF JOINERY FOR DOORS WINDOWS & VENTILATORS

TYPE	OPENING SIZE WIDTH	OPENING SIZE HEIGHT	QUANTITY	DESCRIPTION
D2a	1500	2100	4	ANODISED ALUMINIUM FRAMED PARTLY PANELLED PARTLY GLAZED DOOR OF 2EQ SHUTTERS WITH 6MM THK FLOAT GLASS
D3	1350	2100	16	TREATED HARDWOOD FRAMED WOODEN FLUSH SHUTTER WITH LAMINATE FINISH ON BOTH SIDES
D5	1000	2100	74	TREATED HARDWOOD FRAMED WOODEN FLUSH SHUTTER WITH LAMINATE FINISH ON BOTH SIDES
D5a	1000	2100	5	TREATED HARDWOOD FRAMED WOODEN FLUSH SHUTTER WITH LAMINATE FINISH ON BOTH SIDES WITH VIEW PANEL OF SIZE 150X2550MM SINGLE SHUTTER
D5b	1000	2100	14	TREATED HARDWOOD FRAMED WOODEN FLUSH DOOR OF SINGLE SHUTTER WITH WOODEN LOUVERS AT BOTTOM & LAMINATE FINISH ON BOTH SIDES
D5f	1000	2250	4	TREATED HARDWOOD FRAMED FULLEY PANELLED DOOR OF MARINE PLY PANEL WITH SINGLE SHUTTER
D5g	1000	2100	1	TREATED HARDWOOD FRAMED WOODEN FLUSH DOOR OF SINGLE SHUTTER WITH WOODEN LOUVERS AT BOTTOM & GRAB BARS WITH LAMINATE FINISH ON BOTH SIDES
D6	900	2100	13	TREATED HARDWOOD FRAMED WOODEN FLUSH DOOR OF SINGLE SHUTTER WITH LAMINATE FINISH ON BOTH SIDES
D6a	900	2100	4	TREATED HARDWOOD FRAMED WOODEN FLUSH DOOR OF SINGLE SHUTTER WITH WOODEN LOUVERS AT BOTTOM WITH LAMINATE FINISH ON BOTH SIDES
D6c	900	1200	8	TREATED HARDWOOD FRAMED DOUBLE SHUTTER DOOR 12MM THK PLYWOOD SHUTTER LAMINATE FINISH ON OUTSIDE & PAINTED FINISH ON INSIDE
D7	850	2100	27	TREATED HARDWOOD FRAMED WOODEN FLUSH DOOR OF SINGLE SHUTTER WITH LAMINATE FINISH ON BOTH SIDES
D7a	850	2100	19	TREATED HARDWOOD FRAMED WOODEN FLUSH DOOR OF SINGLE SHUTTER WITH WOODEN LOUVERS AT BOTTOM WITH LAMINATE FINISH ON BOTH SIDES
D7b	850	2100	9	TREATED HARDWOOD FRAMED MARINE PLY PANELLED SHUTTERS FINISHED WITH PAINT
D8	750	2100	34	TREATED HARDWOOD FRAMED WOODEN FLUSH DOOR OF SINGLE SHUTTER WITH WOODEN LOUVERS AT BOTTOM WITH LAMINATE FINISH ON BOTH SIDES
D8b	750	2100	6	TREATED HARDWOOD FRAMED MARINE PLY PANELLED SHUTTERSWITH LAMINATE FINISH ON BOTH SIDES FINISHED WITH PAINT
D9	1200	2400	6	M.S.ANGLED DOOR OF SINGLE SHUTTER
D9c	1200	2100	6	MS FRAMED PARTLY GLAZED PARTLY PANELLED WITH 2EQ STEEL SHUTTER (FYHR)
FD	1000	2100	2	FIRE DOOR OF SINGLE SHUTTER
W1	2400	1500	8	ANODISED ALUMINIUM FRAMED GLAZED SIDE HUNG SHUTTER WINDOW ON ONE SIDE & FIXED GLAZING ON THE OTHER SIDE
W2	1500	1500	37	ANODISED ALUMINIUM FRAMED GLAZED SIDE HUNG SHUTTER WINDOW ON ONE SIDE & FIXED GLAZING ON THE OTHER SIDE
W3	1500	900	2	ANODISED ALUMINIUM FRAMED GLAZED SIDE HUNG SHUTTER WINDOW ON ONE SIDE & FIXED GLAZING ON THE OTHER SIDE
W4	900	1500	11	ANODISED ALUMINIUM FRAMED GLAZED SIDE HUNG SINGLE SHUTTER WINDOW
W5	1050	1500	9	ANODISED ALUMINIUM FRAMED GLAZED SIDE HUNG 2EQ SHUTTERS WINDOW
W7	1200	1500	4	ANODISED ALUMINIUM FRAMED GLAZED SIDE HUNG SHUTTER WINDOW ON ONE SIDE & FIXED GLAZING ON THE OTHER SIDE
W9	1200	1500	2	ANODISED ALUMINIUM FRAMED GLAZED SLIDING WINDOW OF 2EQ SHUTTERS
V1	600	600	14	ANODISED ALUMINIUM FRAMED GLAZED LOUVERED VENTILATOR WITH 4MM THK. GLASS SLATS
V2	1500	600	1	ANODISED ALUMINIUM FRAMED GLAZED LOUVERED VENTILATOR WITH 4MM THK. GLASS SLATS
FG1	12700	1500	1	ALU. FRAMED FIXED GLAZING OF 4MM THK CLEAR FLOAT TINTED GLASS OF 12 EQUAL DIVISIONS
FG2	5250	1500	1	ALU. FRAMED FIXED GLAZING OF 4MM THK CLEAR FLOAT TINTED GLASS OF 15 EQUAL DIVISIONS
FG3	7260	1500	1	ALU. FRAMED FIXED GLAZING OF 4MM THK CLEAR FLOAT TINTED GLASS OF 7 EQUAL DIVISIONS
FG4	6480	1500	1	ALU. FRAMED FIXED GLAZING OF 4MM THK CLEAR FLOAT TINTED GLASS OF 6 EQUAL DIVISIONS
FG5	29975	1500	1	ALU. FRAMED FIXED GLAZING OF 4MM THK CLEAR FLOAT TINTED GLASS OF 29 EQUAL DIVISIONS
FG7	1200	1500	3	ALU. FRAMED FIXED GLAZING OF 4MM THK CLEAR FLOAT TINTED GLASS
FG8	1500	900	2	ALU. FRAMED FIXED GLAZING OF 4MM THK CLEAR FLOAT TINTED GLASS OF 2 EQUAL DIVISIONS
SG1	11520	6600	1	ALU. FRAMED DOUBLE GLAZING OF 6MM THK HEAT STRENTHED TINTED GLASS FOR OUTER SIDE AND 6MM THK CLEAR FLOAT ANNEALED GLASS ON INNER SIDE WITH 12MM THK AIR GAP BETWEEN THE GLASSES WITH 11 EQUAL DIVISIONS.
SG2	7400	6600	2	ALU. FRAMED DOUBLE GLAZING OF 6MM THK HEAT STRENTHED TINTED GLASS FOR OUTER SIDE AND 6MM THK CLEAR FLOAT ANNEALED GLASS ON INNER SIDE WITH 12MM THK AIR GAP BETWEEN THE GLASSES WITH EQUAL DIVISIONS.

NOTES

1. ALL DIMENSIONS ARE IN MM AND ALL LEVELS ARE IN METRES
2. THIS DRG. SHALL BE READ ALONG WITH DRG. NO: 06112-A-HP-01-WD-0002,03,04,05,06 & 07
3. FOR MICROPLANNING DETAILS REFER SEPARATE DRG.
4. FOR PLUMBING & SANITARY FITTINGS LAYOUT, ELECTRICALS & HVAC REQUIRMENT REFER SEPARATE DRG.
5. FOR JOINERY, STAIRCASE, LIFT & TOILET DETAILS REFER SEPARATE DRG.
6. WALL SHOWN HATCHED IN TOILET AREA BUILT UPTO 2100 MM HT. FROM FINISHED FLOOR LEVEL.
7. FINISHED FLOOR LEVEL OF ALL TOILETS TO BE 20 MM LOWER FROM FINISHED FLOOR LEVEL (FFL) OF GENERAL FLOOR AREA. ALL SUCH FLOOR DROPS SHALL BE MADE AS SLOPES FOR EASY PATIENT MOVEMENT
8. LOCATION & SIZE OF DOOR OPENING TO LIFTS WILL BE MODIFIED AS PER LIFT MANUFACTURERS SPECIFICATIONS
9. SILL LEVEL FOR FIRE FIGHTING HOSE REEL IS 900MM FROM FFL
10. FOR STAIRCASE DETAIL REF. 06112-A-HP-01-WD-0015,16,17,18,19 & 20
11. FOR WALLSECTION DETAIL REF. 06112-A-HP-01-WD-0012,13 & 14
12. ANY DISCREPENCIES NOTICED IN THE DRG SHOULD BE BROUGHT TO EDRC'S NOTICE IMMEDIATELY.
13. ALL EXTERNAL WALLS TO BE TAKEN UP TO SOFFIT OF CEILING / BEAMS UNLESS OTHERWISE SPECIFIED
14. FALSE CEILING SHALL BE CONSIDERED AT 2400MM LVL IN ALL CORRIDORS AND AT 2700MM LEVEL AT ALL ROOMS
15. ALL TOILETS CU,DU & BPM SHALL HAVE FALSE CEILING AT 2400MM LEVEL
16. ALL SEVICE AREAS SUCH AS AHU ROOMS, ELECTRICAL ROOMS, LT PANEL ROOMS, FFHR, STAIRCASES, LIFT WELLS, HT PANEL ROOMS, RMU ROOMS, GAS MANIFOLD ROOMS & GAS PLANT ROOM SHALL NOT BE PROVIDED WITH FALSE CEILING
17. THE INTERIOR WALLS SHALL STOP AT 2800MM LVL FROM FFL UNLESS OTHERWISE SPECIFIED
18. ALL DUCT WALLS AND AHU FRONT WALLS SHALL BE CONSTRUCTED ONLY AFTER INSTALLATION OF AHU MACHINES AND CHECKING OF RESPECTIVE SERVICE LINES

LEGEND:

FGL:	FORMED GROUND LEVEL
FFL:	FINISHED FLOOR LEVEL
FRL:	FINISHED ROAD LEVEL
CU:	CLEAN UTILITY
DU:	DIRTY UTILITY
BPM:	BED PAN WASH
AHU:	AIR HANDLING UNIT
LVD:	LOW VOLTAGE DUCT
ED:	ELECTRICAL DUCT
PSD:	PLUMBING & SANITARY DUCT
HVAC-CHD:	HVAC CHILLED WATER DUCT
HVAC-TE:	HVAC TOILET EXHAUST
LVD:	LOW VOLTAGE DUCT
FD:	DUCT FOR WET RISER
EDB:	SPACE FOR ELECTRICAL DISTRIBUTION BOARD
FFHR:	SPACE FOR FIRE FIGHTING HOSE REEL
	BRICK WALL UP TO 2100 HT FROM FFL.
	BRICK WALL UP TO 2500MM HEIGHT
	230MM/115MM THK BRICK WALL UP TO 2800MM HEIGHT
	DRY WALL PARTITION UPTO 1500MM (100MM THK)
	PARTITION WALL UPTO 1500MM
	WALL UP TO CEILING LEVEL (FULL HEIGHT)

MEDICAL DETAILS OF THIS DRAWING SHALL BE REFERRED ALONG WITH MICRO PLANNING DRAWINGS

±0.000 FFL CORRESPONDS TO +99.25 LVL OF SITE AS INDICATED IN SETTING OUT PLAN.

CHECKED BY	SIGN	DATE
ARCHITECTURE		
CIVIL & STRUCTURAL		
PLUMBING & SANITARY		
MECHANICAL		
ELECTRICAL		
FIRE PROTECTION		

REV.NO.	DESCRIPTION	DESIGNED	DRAWN	CHECKED	APPROVED
1	e) JOINERY SCHEDULE REVISED b) ALL RESIDENT DOCTOR ROOM WASH BASIN REMOVED c) OPD RECEPTION TABLE CONFIGURATIONS UPDATED AS PER INTERIOR DRGS. d) GENERAL WARDS, SPECIALWARDS, TREATMENT AND DRESSING ROOM REVISED AS PER VENDOR INPUT & MICRO PLANNING DRGS. a) EDB LOCATION FINALISED AS PER ELECTRICAL REQUIREMENTS f) 115MM BRICKWALL INSIDE EXTERNAL SERVICE DUCTS REVISED AS PER STRUCTURAL INPUT.	NNT 22.11.07	SR 23.11.07	JA 25.11.07	VSH 26.11.07
0	ISSUED FOR CONSTRUCTION	NNT 27.04.07	TJR 02.05.07	JA 03.05.07	VSH 03.05.07

LARSEN & TOUBRO LIMITED
ECC Division - EDRC

CLIENT: HINDUSTAN LATEX LTD., FOR JIMPER PUDUCHERRY

CONSULTANT: TECHNICALIYA CONSULTANTS P LTD., CHENNAI

PROJECT: UPGRADATION OF MEDICARE FACILITIES AT JIPMER, PUDUCHERRY

SUPPLIER / CONTRACTOR :

JOB No. :

	NAME	SIGN	DATE
DSGN	NNT	NNT	27.04.2007
DRWN	TJR	TJR	02.05.2007
CHKD	JA	JA	03.05.2007
APPD	VSH	VSH	03.05.2007

TITLE : SUPER SPECIALTY BLOCK
SECOND FLOOR PLAN

SCALE 1:100

PROJECTION

DRG. No. O 6 1 1 2 - A - H P - 0 1 - W D - 0 0 0 4

SHEET 01 OF 01

SIZE A0 REV. 1

RELEASED FOR ☐ PRELIMINARY ☐ TENDER ☐ INFORMATION ☐ APPROVAL ☑ CONSTRUCTION