This drawing is the property of **Larsen & Toubro Limited**, ECC Division and must not be passed on to any person or body not authorised by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing

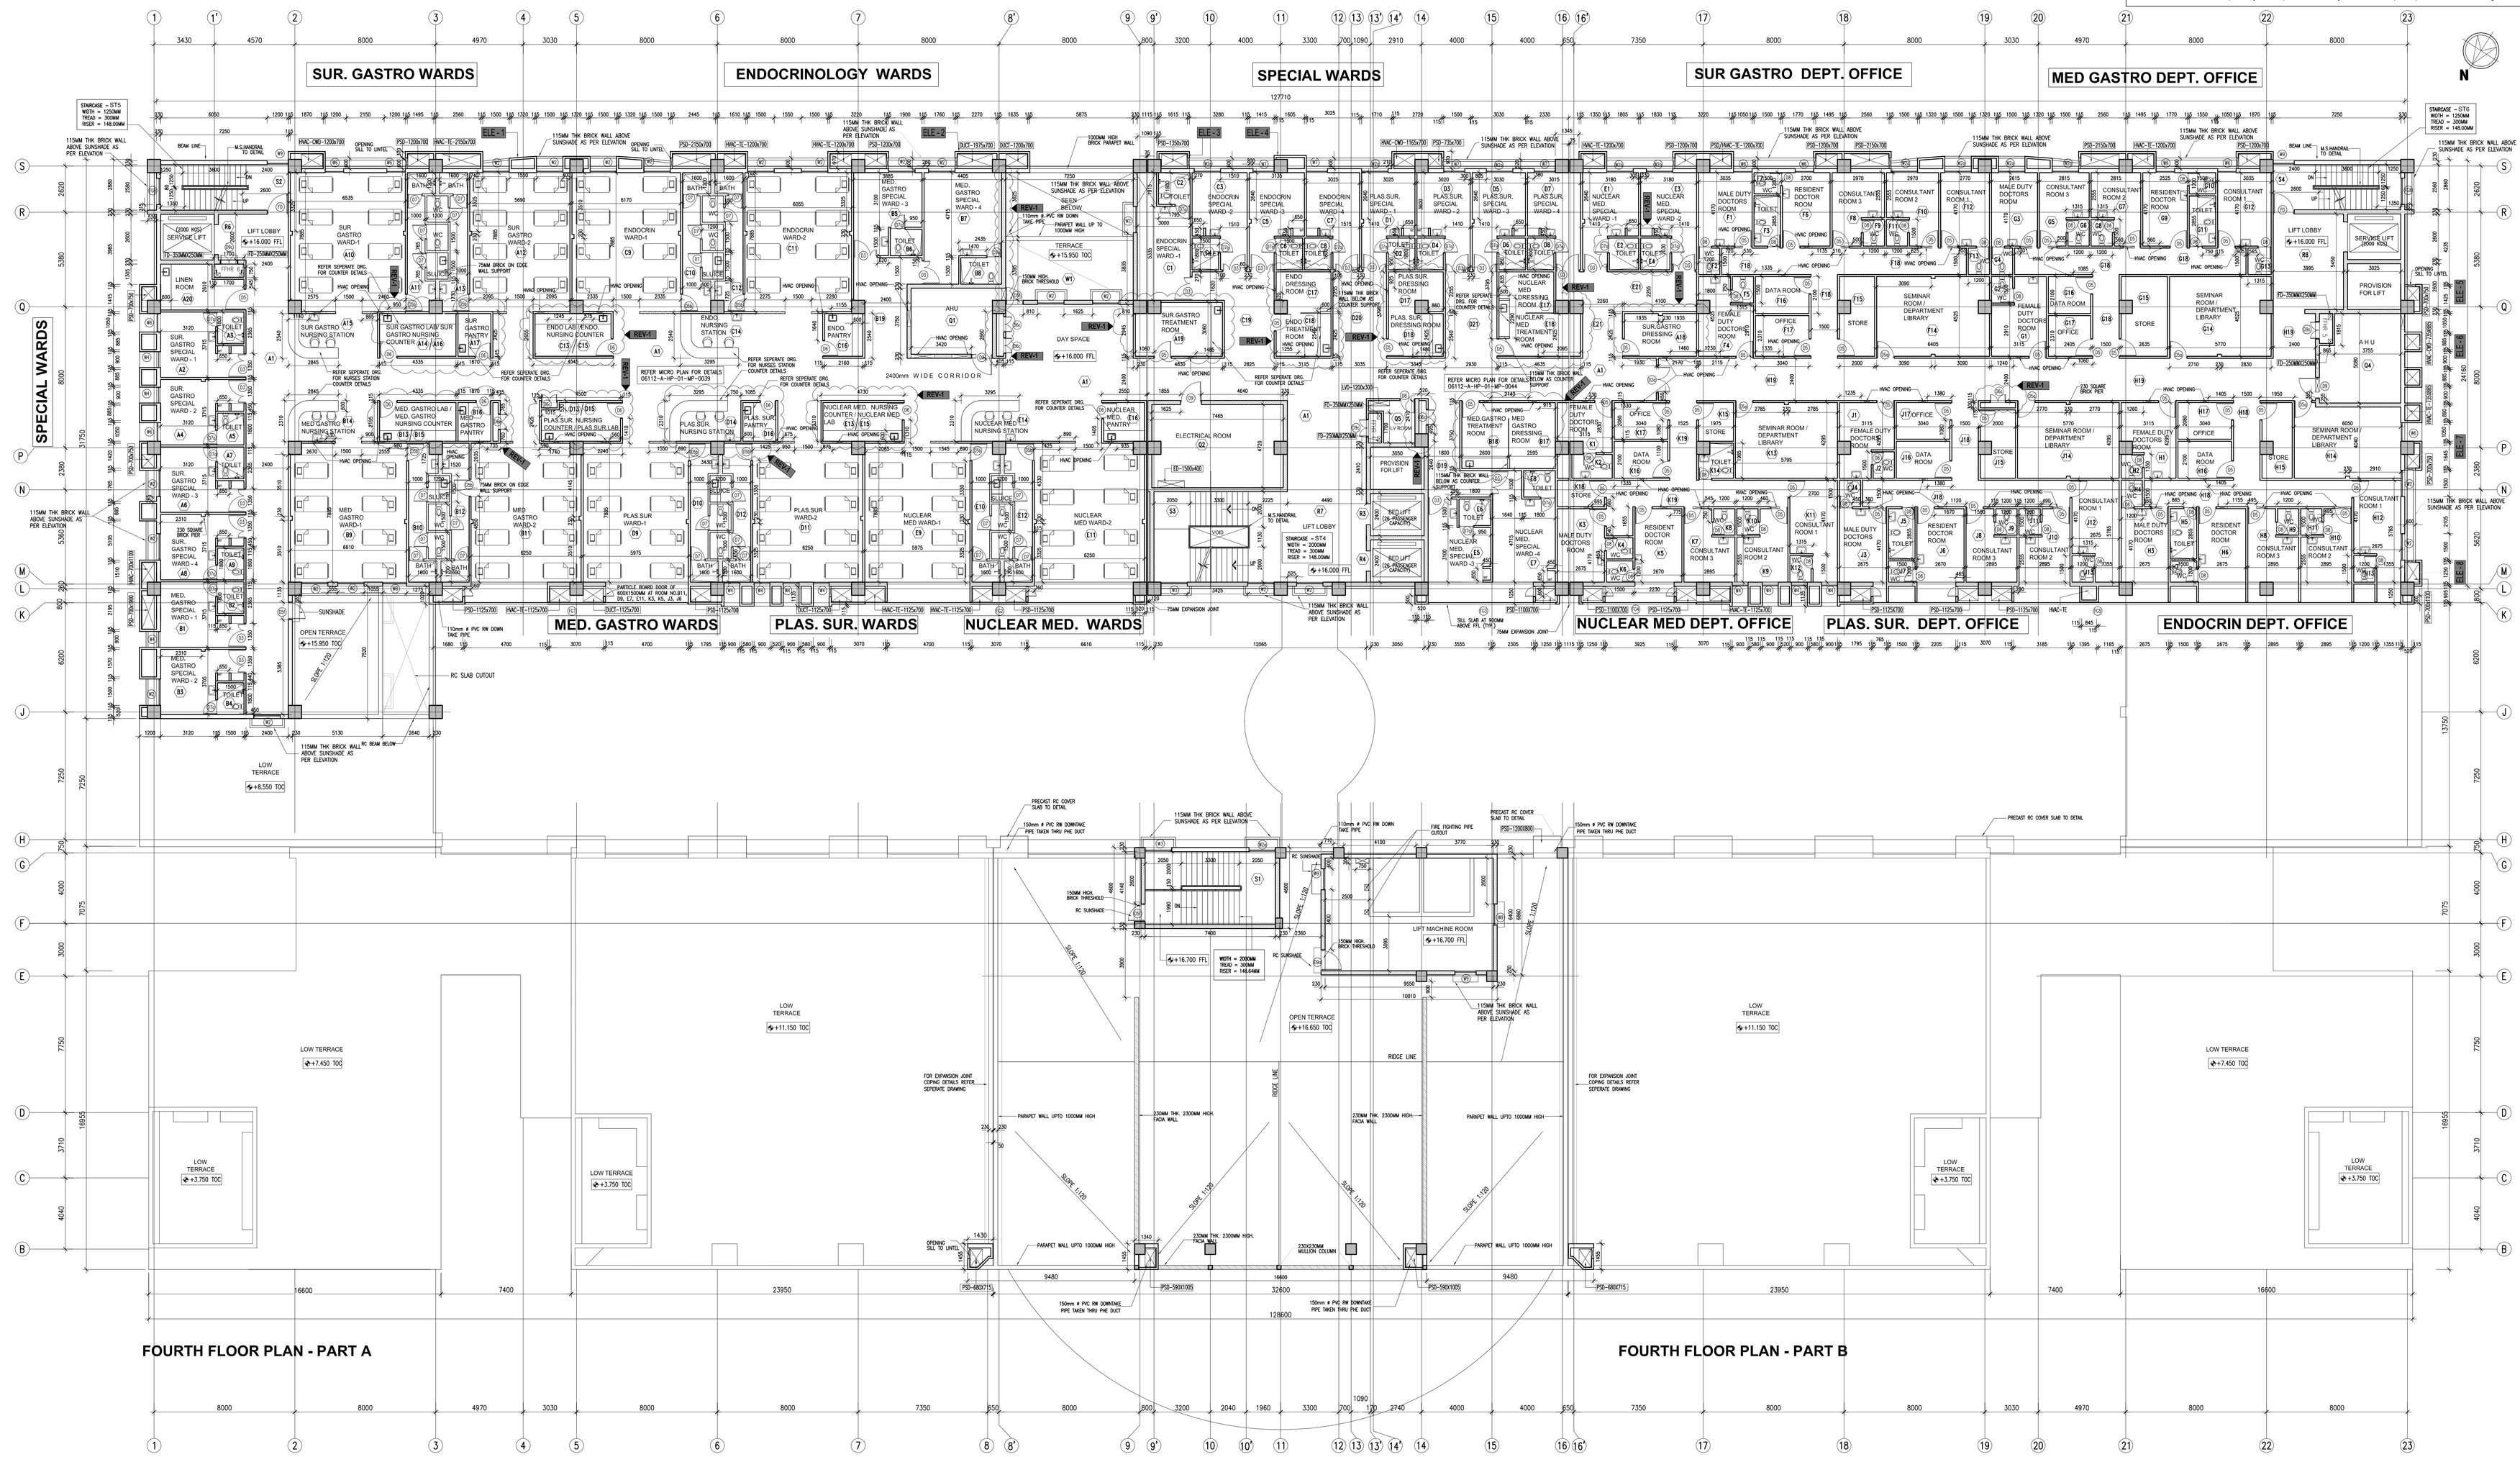

FOURTH FLOOR PLAN - PART A

FOURTH FLOOR PLAN - PART B

SCHEDULE OF JOINERY FOR DOORS WINDOWS & VENTILATORS

TYPE	OPENING SIZE WIDTH	OPENING SIZE HEIGHT	QUANTITY	DESCRIPTION
D2a	1500	2100	1	ANODISED ALUMINIUM FRAMED PARTLY PANELLED PARTLY GLAZED DOOR OF 2EQ SHUTTERS WITH 6MM THK FLOAT GLASS
D3	1350	2100	20	TREATED HARDWOOD FRAMED WOODEN FLUSH SHUTTER WITH LAMINATE FINISH ON BOTH SIDES
D5	1000	2100	53	TREATED HARDWOOD FRAMED WOODEN FLUSH SHUTTER WITH LAMINATE FINISH ON BOTH SIDES
D5a	1000	2100	5	TREATED HARDWOOD FRAMED WOODEN FLUSH SHUTTER WITH LAMINATE FINISH ON BOTH SIDES WITH VIEW PANEL OF SIZE 150X250MM SINGLE SHUTTER
D5b	1000	2100	10	TREATED HARDWOOD FRAMED WOODEN FLUSH DOOR OF SINGLE SHUTTER WITH WOODEN LOUVERS AT BOTTOM & LAMINATE FINISH ON BOTH SIDES
D5f	1000	2250	3	TREATED HARDWOOD FRAMED FULLEY PANELLED DOOR OF MARINE PLY PANEL WITH SINGLE SHUTTER
D6	900	2100	10	TREATED HARDWOOD FRAMED WOODEN FLUSH DOOR OF SINGLE SHUTTER WITH LAMINATE FINISH ON BOTH SIDES
D6c	900	1200	7	TREATED HARDWOOD FRAMED DOUBLE SHUTTER DOOR 12MM THK PLYWOOD SHUTTER LAMINATE FINISH ON OUTSIDE & PAINTED FINISH ON INSIDE
D7	850	2100	25	TREATED HARDWOOD FRAMED WOODEN FLUSH DOOR OF SINGLE SHUTTER WITH LAMINATE FINISH ON BOTH SIDES
D7e	850	2100	20	TREATED HARDWOOD FRAMED WOODEN FLUSH DOOR OF SINGLE SHUTTER WITH WOODEN LOUVERS AT BOTTOM WITH LAMINATE FINISH ON BOTH SIDES
D8	750	2100	36	TREATED HARDWOOD FRAMED WOODEN FLUSH DOOR OF SINGLE SHUTTER WITH WOODEN LOUVERS AT BOTTOM WITH LAMINATE FINISH ON BOTH SIDES
D9	1200	2400	3	M.S.ANGLED DOOR OF SINGLE SHUTTER
D9a	1200	2100	1	M.S.ANGLED DOOR OF SINGLE SHUTTER
D9c	1200	2100	3	MS FRAMED PARTLY GLAZED PARTLY PANELLED WITH 2EQ STEEL SHUTTER (FFHR)

TYPE	OPENING SIZE WIDTH	OPENING SIZE HEIGHT	QUANTITY	DESCRIPTION
FD	1000	2100	2	FIRE DOOR OF SINGLE SHUTTER
W2	1500	1500	21	ANODISED ALUMINIUM FRAMED GLAZED SIDE HUNG SHUTTER WINDOW ON ONE SIDE & FIXED GLAZING ON THE OTHER SIDE
W2a	1500	1500	10	ANODISED ALUMINIUM FRAMED 2 TRACK GLAZED SLIDING WINDOW OF 2EQ. SHUTTERS, 4MM THK CLEAR GLASS.
W3	1500	900	2	ANODISED ALUMINIUM FRAMED GLAZED SIDE HUNG SHUTTER WINDOW ON ONE SIDE & FIXED GLAZING ON THE OTHER SIDE
W4	900	1500	11	ANODISED ALUMINIUM FRAMED GLAZED SIDE HUNG SINGLE SHUTTER WINDOW
W6	1050	1500	9	ANODISED ALUMINIUM FRAMED GLAZED SIDE HUNG 2EQ SHUTTERS WINDOW
W7	1200	1500	4	ANODISED ALUMINIUM FRAMED GLAZED SIDE HUNG SHUTTER WINDOW ON ONE SIDE & FIXED GLAZING ON THE OTHER SIDE
W8	1365	1500	1	ANODISED ALUMINIUM FRAMED GLAZED SIDE HUNG SHUTTER WINDOW ON ONE SIDE & FIXED GLAZING ON THE OTHER SIDE
W9	1200	1500	5	ANODISED ALUMINIUM FRAMED GLAZED SLIDING WINDOW OF 2EQ SHUTTERS
FG1	12700	1500	1	ALU. FRAMED FIXED GLAZING OF 4MM THK CLEAR FLOAT TINTED GLASS OF 12 EQUAL DIVISIONS
FG2	15250	1500	1	ALU. FRAMED FIXED GLAZING OF 4MM THK CLEAR FLOAT TINTED GLASS OF 15 EQUAL DIVISIONS
FG3	7260	1500	1	ALU. FRAMED FIXED GLAZING OF 4MM THK CLEAR FLOAT TINTED GLASS OF 7 EQUAL DIVISIONS
FG4	6480	1500	1	ALU. FRAMED FIXED GLAZING OF 4MM THK CLEAR FLOAT TINTED GLASS OF 6 EQUAL DIVISIONS
FG5	29975	1500	1	ALU. FRAMED FIXED GLAZING OF 4MM THK CLEAR FLOAT TINTED GLASS OF 29 EQUAL DIVISIONS
FG8	1500	900	2	ALU. FRAMED FIXED GLAZING OF 4MM THK CLEAR FLOAT TINTED GLASS OF 2 EQUAL DIVISIONS.

NOTES

1. ALL DIMENSIONS ARE IN MM AND ALL LEVELS ARE IN METRES
2. THIS DRG. SHALL BE READ ALONG WITH DRG. NO: 06112-A-HP-01-WD-0002,03,04,05,06 & 07
3. FOR MICROPLANNING DETAILS REFER SEPARATE DRG.
4. FOR PLUMBING & SANITARY FITTINGS LAYOUT, ELECTRICALS & HVAC REQUIRMENT REFER SEPARATE DRG.
5. FOR JOINERY, STAIRCASE, LIFT & TOILET DETAILS REFER SEPARATE DRG.
6. WALL SHOWN HATCHED IN TOILET AREA BUILT UPTO 2100 MM HT. FROM FINISHED FLOOR LEVEL
7. FINISHED FLOOR LEVEL OF ALL TOILETS TO BE 20 MM LOWER FROM FINISHED FLOOR LEVEL (FFL) OF GENERAL FLOOR AREA. ALL SUCH FLOOR DROPS SHALL BE MADE AS SLOPES FOR EASY PATIENT MOVEMENT
8. LOCATION & SIZE OF DOOR OPENING TO LIFTS WILL BE MODIFIED AS PER LIFT MANUFACTURERS SPECIFICATIONS
9. SILL LEVEL FOR FIRE FIGHTING HOSE REEL IS 900MM FROM FFL
10. FOR STAIRCASE DETAIL REF. 06112-A-HP-01-WD-0015,16,17,18,19 & 20
11. FOR WALLSECTION DETAIL REF. 06112-A-HP-01-WD-0012,13 & 14
12. ANY DISCREPENCIES NOTICED IN THE DRG SHOULD BE BROUGHT TO EDRC'S NOTICE IMMEDIATELY.
13. ALL EXTERNAL WALLS TO BE TAKEN UP TO SOFFIT OF CEILING / BEAMS UNLESS OTHERWISE SPECIFIED
14. FALSE CEILING SHALL BE CONSIDERED AT 2400MM LVL IN ALL CORRIDORS AND AT 2700MM LEVEL AT ALL ROOMS
15. ALL TOILETS CLUDJ & BPM SHALL HAVE FALSE CEILING AT 2400MM LEVEL
16. ALL SEVICE AREAS SUCH AS AHU ROOMS, ELECTRICAL ROOMS, LT PANEL ROOMS, FFHR, STAIRCASES, LIFT WELLS, HT PANEL ROOMS, RMU ROOMS, GAS MANIFOLD ROOMS & GAS PLANT ROOM SHALL NOT BE PROVIDED WITH FALSE CEILING
17. THE INTERIOR WALLS SHALL STOP AT 2800MM LVL FROM FFL UNLESS OTHERWISE SPECIFIED
18. AN DUCT WALLS SHALL BE CONSTRUCTED ONLY AFTER INSTALLATION & CHECKING OF RESPECTIVE SERVICE LINES

LEGEND:

FGL: FORMED GROUND LEVEL
FFL: FINISHED FLOOR LEVEL
FRL: FINISHED ROAD LEVEL
CU: CLEAN UTILITY
DU: DIRTY UTILITY
BPM: BED PAN WASH
A.H.U: AIR HANDLING UNIT
LVD: LOW VOLTAGE DUCT
ED: ELECTRICAL DUCT
PSD: PLUMBING & SANITARY DUCT
HVAC-CWD: HVAC CHILLED WATER DUCT
HVAC-TE: HVAC TOILET EXHAUST
LVD: LOW VOLTAGE DUCT
FD: DUCT FOR WET RISER
EDB: SPACE FOR ELECTRICAL DISTRIBUTION BOARD
FFHR: SPACE FOR FIRE FIGHTING HOSE REEL

BRICK WALL UP TO 2100 HT FROM FFL
BRICK WALL UP TO 2500MM HEIGHT
230MM/115MM THK BRICK WALL UP TO 2800MM HEIGHT
PARTITION WALL UPTO 1500MM
WALL UP TO CEILING LEVEL (FULL HEIGHT)

MEDICAL DETAILS OF THIS DRAWING SHALL BE REFERRED ALONG WITH MICRO PLANNING DRAWINGS

±0.000 FFL CORRESPONDS TO +99.25 LVL OF SITE AS INDICATED IN SETTING OUT PLAN.

CHECKED BY	SIGN	DATE
ARCHITECTURE		
CIVIL & STRUCTURAL		
PLUMBING & SANITARY		
MECHANICAL		
ELECTRICAL		
FIRE PROTECTION		

REV.NO.	DESCRIPTION	DESIGNED	DRAWN	CHECKED	APPROVED
1	a) JOINERY SCHEDULE INCLUDED b) GENERAL WARDS, SPECIALWARDS, TREATMENT AND DRESSING ROOM REVISED AS PER VENDOR INPUT & MICRO PLANNING DRGS. c) EDB LOCATION FINALIZED AS PER ELECTRICAL REQUIREMENTS d) 115MM BRICKWALL INSIDE EXTERNAL SERVICE DUCTS REVISED AS PER STRUCTURAL INPUT. e) WINDOW W2a ADDED	NNT 20.01.08	SR 20.01.08 / JA	JA 25.01.08 / JA	VSH 31.11.07 / VSH
0	ISSUED FOR CONSTRUCTION	NNT 03.05.07	TJR 04.05.07	JA 05.05.07	VSH 05.05.07

REFERENCE:

DETAIL NO
DRAWING NO

LARSEN & TOUBRO LIMITED
ECC Division - EDRC

CLIENT : HINDUSTAN LATEX LTD., FOR JIMPER PUDUCHERRY

CONSULTANT : TECHNICALIYA CONSULTANTS P LTD., CHENNAI

PROJECT : UPGRADATION OF MEDICARE FACILITIES AT JIPMER, PUDUCHERRY

SUPPLIER / CONTRACTOR :

JOB No. :	NAME	SIGN	DATE
DSGN	NNT	NNT	03.05.2007
DRWN	TJR	TJR	04.05.2007
CHKD	JA	JA	05.05.2007
APPD	VSH	VSH	05.05.2007

TITLE : SUPER SPECIALTY BLOCK
FOURTH FLOOR PLAN

SCALE 1:100

PROJECTION

DRG. No. O 6 1 1 2 - A - H P - 0 1 - W D - 0 0 0 6

SHEET 01 OF 01

SIZE A0 REV. 1

RELEASED FOR ☐ PRELIMINARY ☐ TENDER ☐ INFORMATION ☐ APPROVAL ☑ CONSTRUCTION